Instructions for joining two Finger Protector Strips together and fitting the anti-implosion flexible joining brackets

First, join the two Finger Portector Strips together (see diag A - C below), then fit the joining brackets (diag D - F)

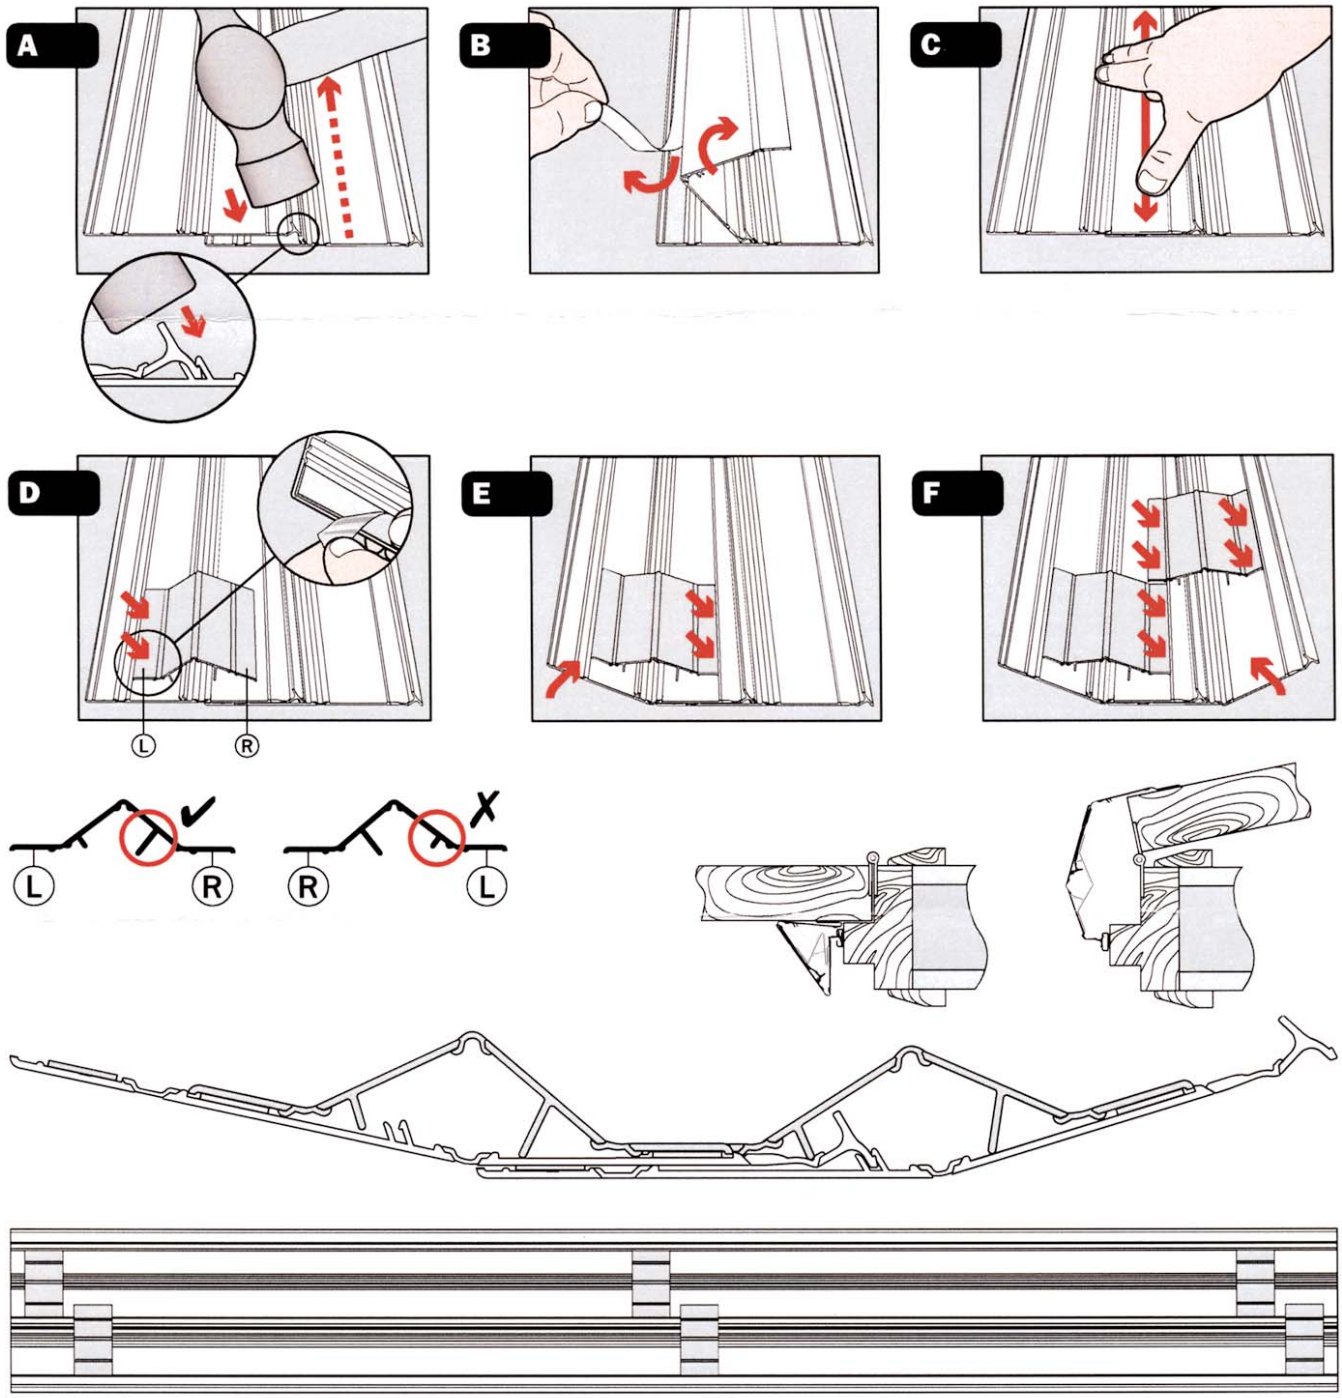

The Finger Protector joining strip pack includes 6 flexible joining brackets which will be used to join two full length Finger Protector Hinge Cavity Protector Strips together for use on doors with wider than standard opening arcs.

The Joining brackets are fixed (via their peel & stick adhesive strips) in pairs as shown above, along the inside length of the Finger Protector Strips.

In operation, when the door is open to its widest angle, the joining strips prevent any possibility of the Finger Protector Shield imploding into the hinge cavity.

If you require any further help or explanation, please contact Insight Security;

Insight Security, Unit 2, Cliffe Industrial Estate, Lewes, East Sussex, BN8 6JL
tel: 01273 475500 fax: 01273 478800, www.insight-security.com

ISO 9001 REGISTERED FIRM
OISXFPJOIN